



Przepusty GH - gumowe

materiał: guma SBR+NR


kolor: czarny RAL9004

temp. montażu: -10°C + 60°C

temp. pracy: -30°C +85°C

dla panelu o grubości: 2 mm

tolerancja: ±5%

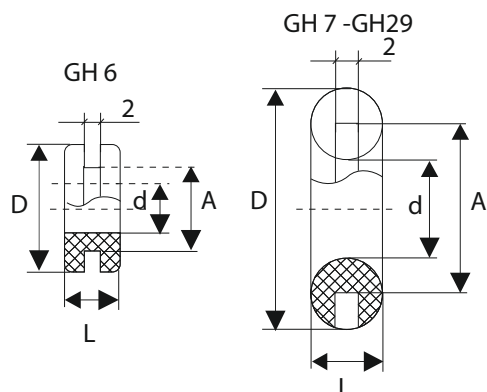

TYP	WYMIARY [mm]				OPAKOWANIE [szt]	
	A	D	d	L		
GH-6	10,0	15,0	6,0	9,0	10	■
GH-7	13,0	20,0	8,0	6,5	10	■
GH-9	15,5	24,0	10,0	9,0	10	■
GH-11	21,0	28,0	13,5	9,0	10	■
GH-13	23,0	29,0	15,0	9,0	10	■
GH-16	25,0	31,0	16,0	9,0	10	■
GH-21	32,0	38,0	24,0	9,0	10	■
GH-29	38,0	45,0	30,0	10,0	10	■