



Zaślepki ZPG - do otworu

materiał: poliamid 6.6

kolor: szary RAL7035


temp. montażu: -10°C +60°C

temp. pracy: -40°C do +85°C

dla panelu o grubości: 0,8 - 3,2 mm

palność: UL-94 V2

tolerancja: ±5%

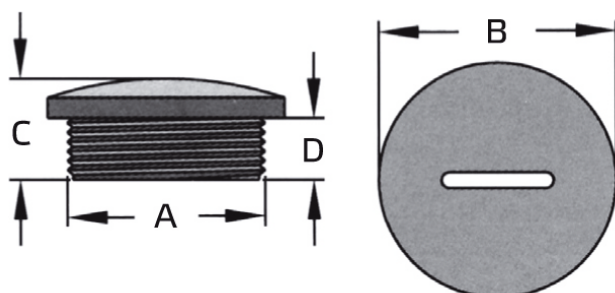

TYP	ROZMIAR GWINTU	WYMIARY [mm]				OPAKOWANIE [szt]	
		A	B	C	D		
ZPG-7	PG7	12,2	14,8	10,0	6,0	10	<input type="checkbox"/>
ZPG-9	PG-9	15,1	18,7	10,4	6,0	10	<input type="checkbox"/>
ZPG-11	PG-11	18,5	21,7	10,4	6,0	10	<input type="checkbox"/>
ZPG-13,5	PG-13,5	20,3	23,7	10,3	6,0	10	<input type="checkbox"/>
ZPG-16	PG-16	22,3	27,0	10,3	6,0	10	<input type="checkbox"/>
ZPG-21	PG-21	28,2	32,8	12,8	7,8	10	<input type="checkbox"/>
ZPG-29	PG-29	37,0	44,1	13,3	7,8	10	<input type="checkbox"/>
ZPG-36	PG-36	47,0	52,6	13,7	7,7	5	<input type="checkbox"/>
ZPG-42	PG-42	54,0	59,5	16,3	9,6	5	<input type="checkbox"/>
ZPG-48	PG-48	59,6	64,2	18,0	11,8	5	<input type="checkbox"/>

RoHS
Compliant

HF
Halogen Free