




Uchwyty UWO

materiał: polipropylen
temp. montażu: > -5°C
temp. pracy: -20°C +60°C
tolerancja: ±5%

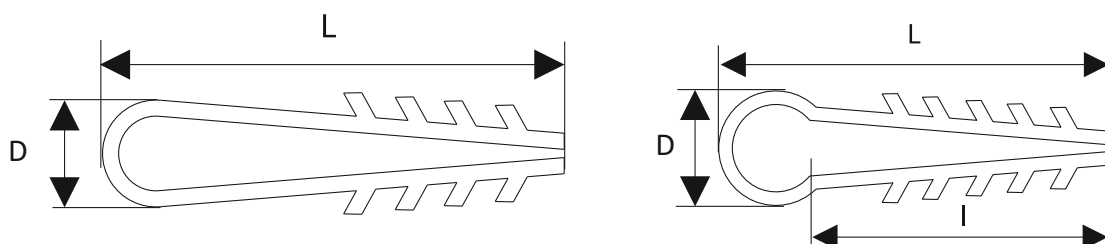

TYP	DLA PRZEWODÓW OKRĄGŁYCH TYPU	ŚREDNICA PRZEWODU LUB KABLA [mm]	WYMIARY [mm]			ROZMIAR WIERTŁA [mm]	OPAKOWANIE [szt]	
			D	L	I			
UWO-6	YTDY: 2-10x0.5; YTKSY: 1-5x2x0.5; DY:4,6	6	8,5	31,5	-	5	100	<input type="checkbox"/>
UWO-8	RG-6; YDY: 2x1,5; 3x1; 3x1,5	8	10,5	43,5	-	6	100	<input type="checkbox"/>
UWO-10	YDY: 2x4; 2x6; 3x4; 3x2,5; 4x2,5; 5x1,5	10	12	43	33	6	100	<input type="checkbox"/>
UWO-12	YDY: 3x6; 5x4; 4x6; 7x2,5; 10x1	12	16	49	35	6,5 - 7	50	<input type="checkbox"/>
UWO-14	YDY: 5x6; 2x10; 3x10; 7x4; 10x1,5	14	18	49	32	6,5 - 7	50	<input type="checkbox"/>
UWO-16	YDY: 7x6; 4x6; 4x10	16	21	59	40	8	50	<input type="checkbox"/>
UWO-18	YDY: 5x10; 7x10	18	23	59	40	8	50	<input type="checkbox"/>
UWO-20	peszel 20/14; rurka PCV Ø 20	20	25	59	37	8	50	<input type="checkbox"/>