

Thin wall shrinking tubes WRTS black, color

material: polyolefin

operating temp: -55°C to +125°C



fully shrink temp.: +125°C

shrink ratio: 2:1

flammability: self-extinguishing

halogen free: yes

tolerance: ±5%

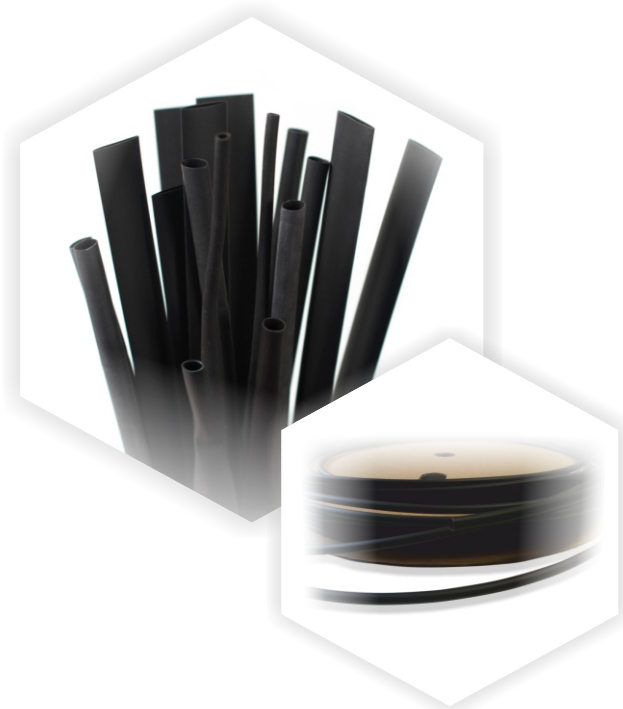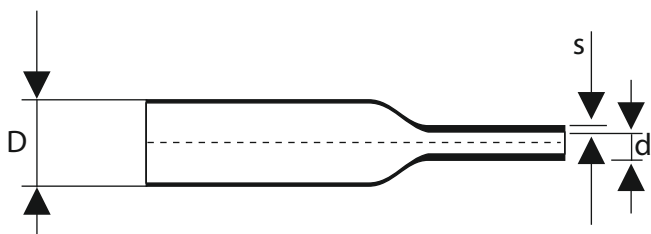

TYPE	SIZE				LENGTH [m]	 QUANTITY [pcs.]	
	AS SUPPLIED		AFTER SHRINKING				
	OUTER DIAMETER		INNER DIAMETER	WALL THICKNESS			
	D ["]	D [mm]	d [mm]	s [mm]			
WRTS-1,6/0,8*	1/16	1,6	0,8	0,28	200	1	■
WRTS-2,4/1,2	3/32	2,4	1,2	0,35	200	1	■
WRTS-3,2/1,6	1/8	3,2	1,6	0,40	200	1	■
WRTS-4,8/2,4	3/16	4,8	2,4	0,50	100	1	■
WRTS-6,4/3,2	1/4	6,4	3,2	0,55	100	1	■
WRTS-9,5/4,8	3/8	9,5	4,8	0,60	100	1	■
WRTS-12,7/6,4	1/2	12,7	6,4	0,60	100	1	■
WRTS-19,0/9,5	3/4	19	9,5	0,80	100	1	■
WRTS-25,4/12,7	1	25,4	12,7	0,90	50	1	■
WRTS-38,1/19,1	1 1/2	38,1	19,1	1,00	50	1	■
WRTS-50,8/25,4*	2	50,8	25,4	1,00	25	1	■

* available on request

WRTS in colors are available upon special request.



Thin wall shrinking tubes WRTS clear

material: polyolefin

color: clear


operating temp: -55°C to +105°C

fully shrink temp.: +105°C

shrink ratio: 2:1

halogen free: yes

tolerance: ±5%

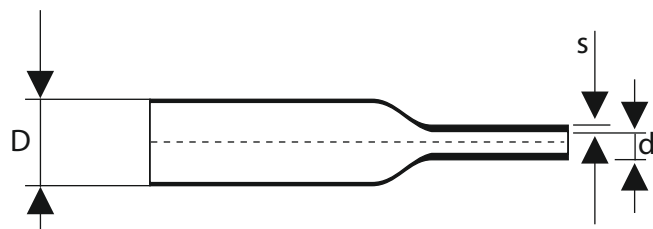

TYPE	SIZE				LENGTH [m]	 QUANTITY [pcs.]
	AS SUPPLIED		AFTER SHRINKING			
	OUTER DIAMETER		INNER DIAMETER	WALL THICKNESS		
	D ["]	D [mm]	d [mm]	s [mm]		
WRTS-1,6/0,8*	1/16	1,6	0,8	0,28	200	1
WRTS-2,4/1,2*	3/32	2,4	1,2	0,35	200	1
WRTS-3,2/1,6*	1/8	3,2	1,6	0,40	200	1
WRTS-4,8/2,4*	3/16	4,8	2,4	0,50	100	1
WRTS-6,4/3,2*	1/4	6,4	3,2	0,55	100	1
WRTS-9,5/4,8*	3/8	9,5	4,8	0,60	100	1
WRTS-12,7/6,4*	1/2	12,7	6,4	0,60	100	1
WRTS-19,0/9,5*	3/4	19	9,5	0,80	100	1
WRTS-25,4/12,7*	1	25,4	12,7	0,90	50	1
WRTS-38,1/19,1*	1 1/2	38,1	19,1	1,00	50	1
WRTS-50,8/25,4*	2	50,8	25,4	1,00	25	1

* available on request

