



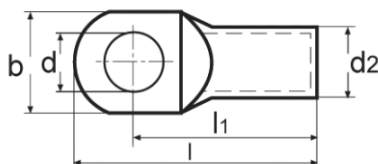

Końcówki kablowe DIN

materiał: miedź cynowana
min. warstwa pocynowania: 3µm
zgodność: DIN 46235



TYP	PRZEKRÓJ [mm ²]	POD ŚRUBĘ Ø M	WYMIARY [mm]									OPAKOWANIE [szt]
			d	d1	d2	l	l1	a	b	c	c1	
DIN-01005	10	M5	5,3	4,5	7,0	34,0	27,0	10,0	9,0	7,0	8,5	10
DIN-01006	10	M6	6,4	4,5	7,0	34,5	27,0	10,0	9,0	7,5	8,5	10
DIN-01606	16	M6	6,4	5,5	8,5	43,5	36,0	20,0	13,0	7,5	8,0	10
DIN-01608	16	M8	8,4	5,5	8,5	46,0	36,0	20,0	13,0	10,0	10,0	10
DIN-01610	16	M10	10,5	5,5	8,5	48,0	36,0	20,0	17,0	12,0	12,0	10
DIN-02506	25	M6	6,4	7,0	10,0	45,5	38,0	20,0	14,0	7,5	8,0	10
DIN-02508	25	M8	8,4	7,0	10,0	48,0	38,0	20,0	16,0	10,0	10,0	10
DIN-02510	25	M10	10,5	7,0	10,0	50,0	38,0	20,0	17,0	12,0	12,0	10
DIN-02512	25	M12	13,0	7,0	10,0	51,0	38,0	20,0	19,0	13,0	13,0	10
DIN-03508	35	M8	8,4	8,2	12,5	52,0	42,0	20,0	17,0	10,0	10,0	10
DIN-03510	35	M10	10,5	8,2	12,5	54,0	42,0	20,0	19,0	12,0	12,0	10
DIN-03512	35	M12	13,0	8,2	12,5	55,0	42,0	20,0	21,0	13,0	13,0	10
DIN-05008	50	M8	8,4	10,0	14,5	62,0	52,0	28,0	20,0	10,0	10,0	10
DIN-05010	50	M10	10,5	10,0	14,5	64,0	52,0	28,0	22,0	12,0	12,0	10
DIN-05012	50	M12	13,0	10,0	14,5	65,0	52,0	28,0	24,0	13,0	13,0	10
DIN-05016	50	M16	17,0	10,0	14,5	68,0	52,0	28,0	28,0	16,0	16,0	10
DIN-07008	70	M8	8,4	11,5	16,5	65,0	55,0	28,0	24,0	10,0	10,0	10
DIN-07010	70	M10	10,5	11,5	16,5	67,0	55,0	28,0	24,0	12,0	12,0	10
DIN-07012	70	M12	13,0	11,5	16,5	68,0	55,0	28,0	24,0	13,0	13,0	10
DIN-09510	95	M10	10,5	13,5	19,0	77,0	65,0	35,0	28,0	12,0	12,0	10
DIN-09512	95	M12	13,0	13,5	19,0	78,0	65,0	35,0	28,0	13,0	13,0	10
DIN-12010	120	M10	10,5	15,5	21,0	85,0	70,0	35,0	32,0	15,0	16,0	5
DIN-12012	120	M12	13,0	15,5	21,0	86,0	70,0	35,0	32,0	16,0	17,0	5
DIN-12016	120	M16	17,0	15,5	21,0	89,0	70,0	35,0	32,0	19,0	20,0	5
DIN-15010	150	M10	10,5	17,0	23,5	93,0	78,0	35,0	34,0	15,0	16,0	5
DIN-15012	150	M12	13,0	17,0	23,5	94,0	78,0	35,0	34,0	16,0	17,0	5
DIN-15016	150	M16	17,0	17,0	23,5	97,0	78,0	35,0	34,0	19,0	20,0	5
DIN-18510	185	M10	10,5	19,0	25,5	97,0	82,0	40,0	37,0	15,0	16,0	5
DIN-18512	185	M12	13,0	19,0	25,5	98,0	82,0	40,0	37,0	16,0	17,0	5
DIN-18516	185	M16	17,0	19,0	25,5	101,0	82,0	40,0	37,0	19,0	20,0	5
DIN-24012	240	M12	13,0	21,5	29,0	108,0	92,0	40,0	42,0	16,0	17,0	1
DIN-24016	240	M16	17,0	21,5	29,0	111,0	92,0	40,0	42,0	19,0	20,0	1