



Przepusty TPG


materiał: elastomer termoplastyczny TPE

kolor: szary RAL7035

stopień szczelności: IP 67

temp. pracy: -50°C do +125°C

tolerancja: ±5%

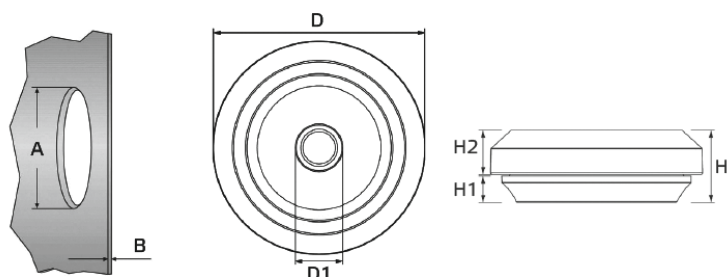

TYP	ŚREDNICA ZEWNĘTRZNA PRZEWODU [mm]	GRUBOŚĆ ŚCIANKI B [mm]	WYMIARY [mm]						OPAKOWANIE [szt]	
			A	D	D1	H	H1	H2		
TPG-M16GR	5 - 10	0,5 - 3,0	16,5	23,5	4,0	11,0	4,0	6,75	10	<input type="checkbox"/>
TPG-M20GR	6 - 13	0,5 - 3,0	20,5	27,5	5,0				10	<input type="checkbox"/>
TPG-M25GR	8 - 17	0,5 - 3,5	25,5	32,5	7,0				10	<input type="checkbox"/>
TPG-M32GR	12 - 24	0,5 - 4,5	32,5	39,5	11,0				5	<input type="checkbox"/>

CE **RoHS**
Compliant