



## Uchwyty FLOP P


materiał: polipropylen

gwóźdź: stal

temp. montażu: > -5°C

temp. pracy: -40°C +85°C

tolerancja: ±5%

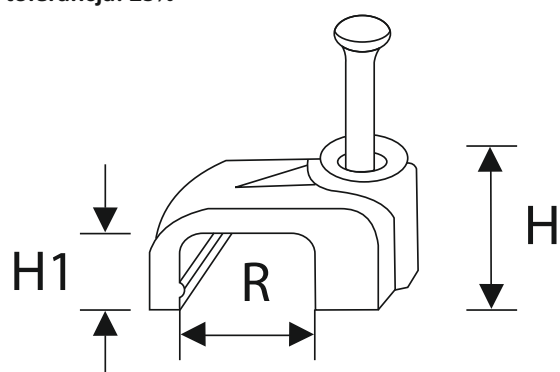

TYP	DLA PRZEWODÓW PŁASKICH [mm]	WYMIARY [mm]			OPAKOWANIE [szt]	
		R	H	H1		
FLOP-P4/4	2x0,75	4,0	6,0	3,8	100	<input type="checkbox"/>
FLOP-P6/4	2x1,0	6,0	6,5	4,1	100	<input type="checkbox"/>
FLOP-P7/4,5	2x1,5	7,0	7,0	4,7	100	<input type="checkbox"/>
FLOP-P8/5	2x2,5	8,0	7,5	5,0	100	<input type="checkbox"/>
FLOP-P10/6	3x1,5	10,0	8,6	5,7	100	<input type="checkbox"/>
FLOP-P12/6	3x2,5	12,0	9,0	6,1	100	<input type="checkbox"/>





## Uchwyty FLOP O


materiał: polipropylen

gwóźdź: stal

temp. montażu: > -5°C

temp. pracy: -40°C +85°C

tolerancja: ±5%

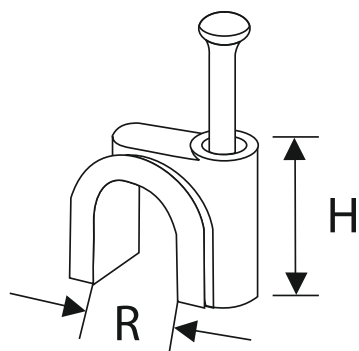

TYP	DLA PRZEWODÓW OKRĄGLYCH [mm]	WYMIARY [mm]		OPAKOWANIE [szt]	
		R	H		
FLOP-03	3,5	3,5	4,5	100	<input type="checkbox"/>
FLOP-04	4,0	4,0	5,3	100	<input type="checkbox"/>
FLOP-05	5,0	5,0	6,5	100	<input type="checkbox"/>
FLOP-06	6,0	6,0	8,1	100	<input type="checkbox"/>
FLOP-07	7,0	7,0	8,7	100	<input type="checkbox"/>
FLOP-08	8,0	8,0	9,6	100	<input type="checkbox"/>
FLOP-09	9,0	9,0	10,5	100	<input type="checkbox"/>
FLOP-010	10,0	10,0	11,7	100	<input type="checkbox"/>
FLOP-012	12,0	12,0	12,8	100	<input type="checkbox"/>
FLOP-014	14,0	14,0	14,9	100	<input type="checkbox"/>
FLOP-016	16,0	16,0	16,9	100	<input type="checkbox"/>

