



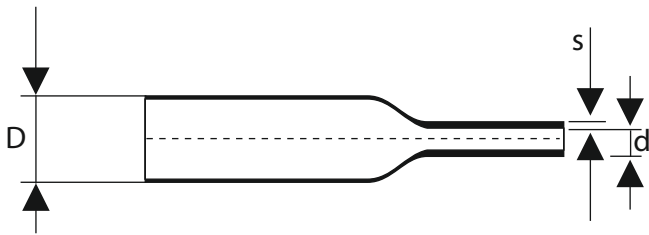
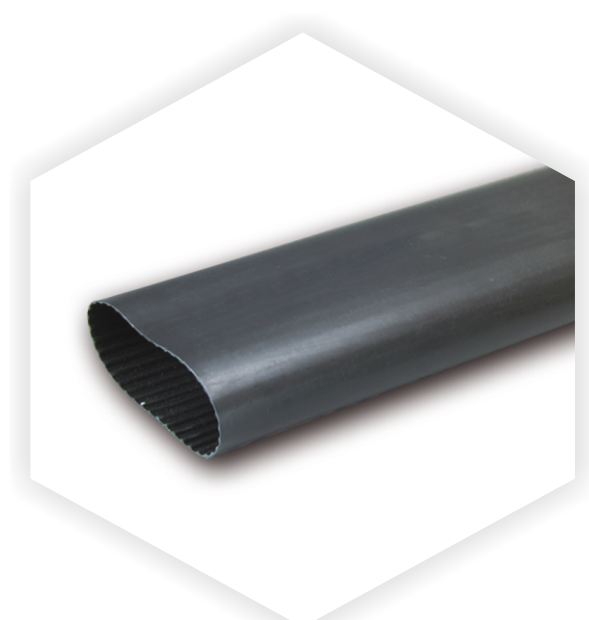
Heat shrink tube RTDS



material: polyolefin

work temp.: -45°C do +125°C

full shrinking temp.: +125°C

tolerance: ±5%



TYPE	SIZE				 QUANTITY [pcs]	
	INNER DIAMETER		WALL THICKNESS	LENGTH		
	D [mm]	d [mm]	s [mm]	[m]		
RTDS-175/50	170	58	3,3	1	1	■
RTDS-250/70	250	78	3,8	1	1	■

RoHS
Compliant