




Repair kit ZMR


material: polyolefin

min. shrinking temp.: +100°C

min. full shrinking temp.: +120°C

tolerance: ±5%

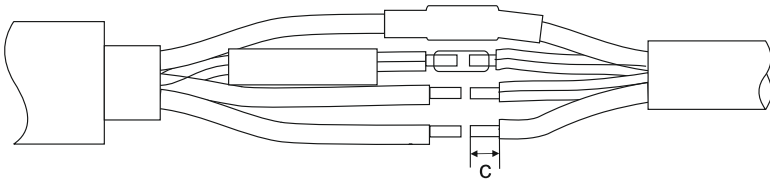

TYPE	CABLE DIMENSIONS [mm ²]	DIAMETER FOR INNER SHRINKING TUBES		DIAMETER FOR OUTER SHRINKING TUBES		
		Ø BEFORE/AFTER SHRINKING - L [mm]	pcs	Ø BEFORE/AFTER SHRINKING - L [mm]	pcs	
ZMR-0-4ŻYŁY	2,5-10	12/3 - 90	4	33/8 - 330	1	■
ZMR-1L-4ŻYŁY	16-35	22/6 - 200	4	40/12 - 800	1	■
ZMR-2L-4ŻYŁY	25-70	22/6 - 200	4	55/16 - 800	1	■
ZMR-3L-4ŻYŁY	50-95	28/6 - 200	4	65/19 - 800	1	■
ZMR-4L-4ŻYŁY	120-150	33/8 - 250	4	75/22 - 1000	1	■
ZMR-5L-4ŻYŁY	120-240	40/14 - 250	4	95/30 - 1000	1	■

HF