




## Medium wall shrinking tubes with adhesive RTMK

material: polyolefin + adhesive  
 operating temp: -55°C to +110°C  
 fully shrink temp.: +120°C  
 shrink ratio: 3:1  
 flammability: self-extinguishing  
 halogen free: yes  
 tolerance: ±5%

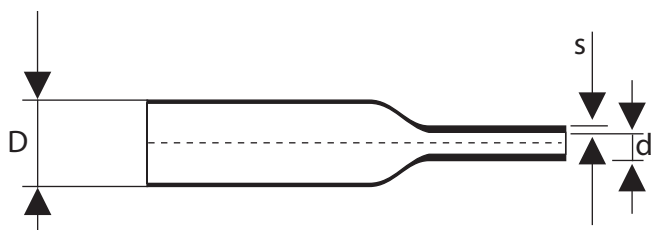

TYPE	SIZE				QUANTITY [pcs.]	
	INNER DIAMETER		WALL THICKNESS	LENGTH		
	D [mm]	d [mm]	s [mm]	[m]		
RTMK-8/2	8	2	1,7	1	10	■
RTMK-12/3	12	3	2,0	1	10	■
RTMK-16/5	16	5	2,2	1	10	■
RTMK-22/6	22	6	2,5	1	5	■
RTMK-28/6	28	6	2,5	1	5	■
RTMK-33/8	33	8	2,5	1	4	■
RTMK-40/12	40	12	2,7	1	3	■
RTMK-55/16	55	16	2,8	1	2	■
RTMK-65/19	65	19	2,8	1	2	■
RTMK-75/22	75	22	3,0	1	2	■
RTMK-85/25	85	25	3,0	1	2	■
RTMK-115/34	115	34	3,2	1	2	■
RTMK-140/42	140	42	3,3	1	2	■

