

OPASKI GTK - z tabliczką opisową

materiał: poliamid 6.6

temp. montażu: -10°C do +60°C




temp. pracy: -40°C do +85°C

wytrzymałość dielektryczna: 50kV/mm²

absorpcja wody: 2,5% (50% R.H., +23°C)

palność: UL-94 V2

tolerancja: ±5%

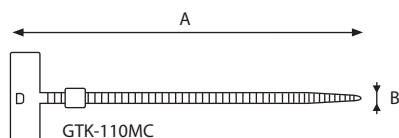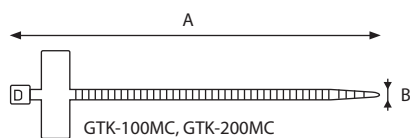

TYP	 ROZMIAR [mm]	max  ŚREDNICA [mm]	 WYTRZYMAŁOŚĆ [kg]	 WYMIAR TABLICZKI [mm]	 OPAKOWANIE [szt]	
GTK-100MC	100x2,5	23	8	25x8	100	<input type="checkbox"/>
GTK-110MC	110x2,5	20	8	25x8	100	<input type="checkbox"/>
GTK-200MC	200x2,5	50	8	30x15	100	<input type="checkbox"/>
GTK-190STC	200x4,6	50	22	13x28	100	<input type="checkbox"/>
GTK-300STC	270x4,6	75	22	13x28	100	<input type="checkbox"/>

