



Cable ties with mounting eyelet GTM - natural

material: polyamide 6.6

installation temp.: -10°C to +60°C


working temp.: -40°C to +85°C

dielectric resistance: 50kV/mm²

humidity absorption: 2,5% (50% R.H., +23°C)

flammability to raw material: UL-94 V2

tolerance: ±5%

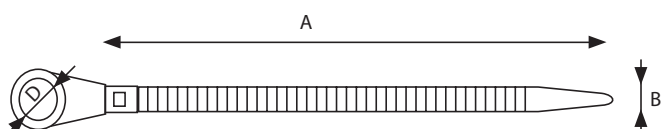

TYPE	 DIMENSIONS [mm]	 max/min BUNDLE DIAMETER [mm]	 TENSILE STRENGTH [kg]	 MOUNTING EYELET D [mm]	 PACKAGE [pcs]	
GTM-100MC	110x2,5	25	8	3,2 (M3)	100	<input type="checkbox"/>
GTM-150IC	171x3,7	40	18	5,0 (M5)	100	<input type="checkbox"/>
GTM-190STC	219x4,2	52	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-300STC	300x4,8	85	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-370STC	370x4,8	102	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-430HD	410x7,9	112	55	6,0 (M6)	100	<input type="checkbox"/>



RoHS
Compliant



TRYTYT.COM![®]