

OPASKI GTM - z oczkiem montażowym

materiał: poliamid 6.6

temp. montażu: -10°C do +60°C


temp. pracy: -40°C do +85°C

wytrzymałość dielektryczna: 50 kV/mm²

absorpcja wody: 2,5% (50% R.H., +23°C)

palność: UL-94 V2

tolerancja: ±5%

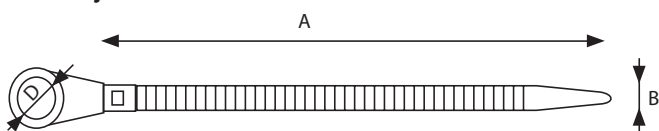

TYP	ROZMIAR [mm]	max ŚREDNICA [mm]	WYTRZYMAŁOŚĆ [kg]	OTWÓR [mm]	OPAKOWANIE [szt]	
GTM-100MC	110x2,5	25	8	3,2 (M3)	100	<input type="checkbox"/>
GTM-150IC	171x3,7	40	18	5,0 (M5)	100	<input type="checkbox"/>
GTM-190STC	219x4,2	52	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-300STC	300x4,8	85	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-370STC	370x4,8	102	22	5,0 (M5)	100	<input type="checkbox"/>
GTM-430HD	410x7,9	112	55	6,0 (M6)	100	<input type="checkbox"/>

