


Thin wall shrinking tubes with adhesive RTCK

material: polyolefin + adhesive operating temp: -55°C to +125°C fully shrink temp.: +110°C shrink ratio: 3:1 or 4:1 flammability: self-extinguishing halogen free: yes tolerance: ±5%



	Landanian and and and and and and and and and a					
ТҮРЕ	AS SUPPLIED		WALL THICKNESS	LENGTH	QUANTITY	
	D [mm]	d [mm]	s [mm]	[m]	[pcs.]	
RTCK-3/1	3	1	1,0	1,22	10	
RTCK-4/1	4	1	1,0	1,22	10	
RTCK-6/2	6	2	1,0	1,22	10	
RTCK-8/2	8	2	1,0	1,22	10	
RTCK-12/3	12	3	1,4	1,22	10	

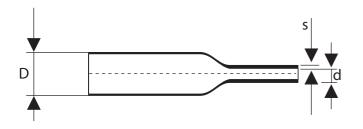



