






## Złączki 12-torowe LPA

materiał: poliamid 66 + mosiądz niklowany  
temp. pracy: -25°C do +110°C  
zgodność z: UL 94V-2  
tolerancja: ±5%

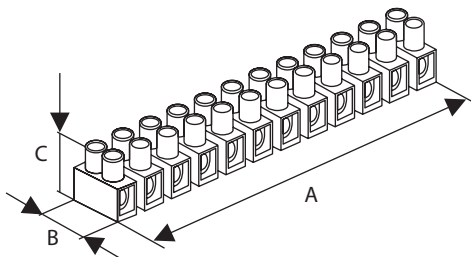

TYP	WYMIARY [mm]						PRZEKRÓJ ZŁĄCZKI	PRĄD ZNAMIONOWY [A]	NAPIĘCIE ZNAMIONOWE [V]	OPAKOWANIE [szt]	
	A	B	C	D	E	F					
LPA-12-1,5	96,2	17,0	14,3	8,2	2,9	2,8	0,75 - 1,5	17,5	450	50	<input type="checkbox"/>
LPA-12-2,5	96,2	17,0	14,3	8,2	2,9	2,8	1 - 2,5	24	450	50	<input type="checkbox"/>
LPA-12-4	117,2	20,0	16,4	10,0	3,6	3,4	1 - 4	32	450	50	<input type="checkbox"/>
LPA-12-6	140,7	23,8	19,0	12,0	3,9	4,2	2,5 - 6	41	500	40	<input type="checkbox"/>
LPA-12-10	158,0	25,6	25,0	13,5	4,4	5,0	4 - 10	57	500	25	<input type="checkbox"/>

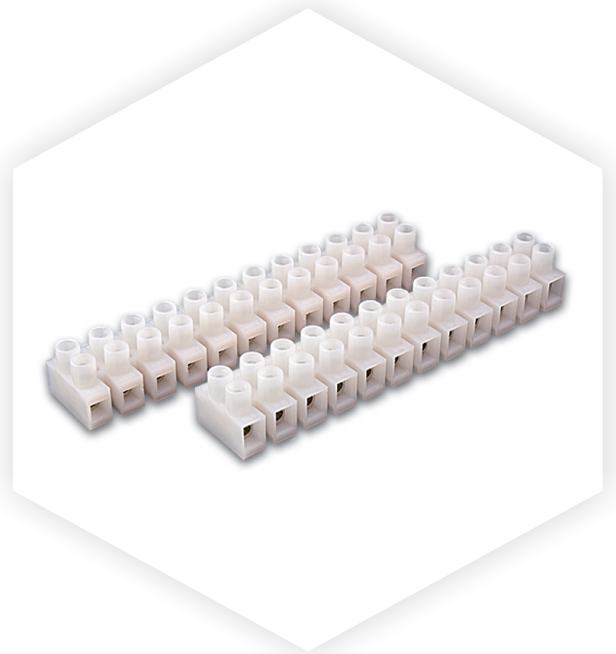