





Repair kit SVCZ

material: polyolefin
min. full shrinking temp.: 120°C
tolerance: ±5%

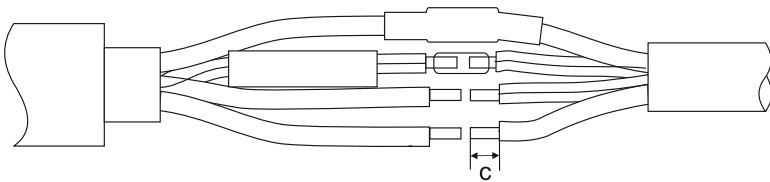

TYPE	CABLE DIMENSIONS [mm ²]	DIAMETER FOR INNER SHRINKING TUBES		DIAMETER FOR OUTER SHRINKING TUBES		
		Ø BEFORE/AFTER SHRINKING - L [mm]	pcs	Ø BEFORE/AFTER SHRINKING - L [mm]	pcs	
SVCZ-S4-1	AL/CU 4x10 - 35 RE	22/6 - 115	4	75/22 - 400	1	■
SVCZ-S4-2	AL/CU 4x50 RE AL/CU 4x75 SE AL/CU 4x95 SE (90°), RM, SM (r)	33/8 - 160	4	85/25 - 550	1	■
SVCZ-S4-3	AL/CU 3x120 + 70 SE + RE AL/CU 4x120 SE+SM AL/CU 4x150 SM	40/12 - 200	4	95/29 - 700	1	■
SVCZ-S4-4	AL/CU 3x185 + 95 SE+RE AL 3x240 + 120 SE+ SM, RE	40/12 - 250 40/12 - 200	3 1	115/34 - 850	1	■
SVCZ-S4-41	AL 3x185 + 95 SM+RE AL 3x240 + 120 SM+SM, RE AL 4x185 SM AL 4x240 SM	40/12 - 250	4	115/34 - 850	1	■